


Artificial Intelligence detection for Grain Size

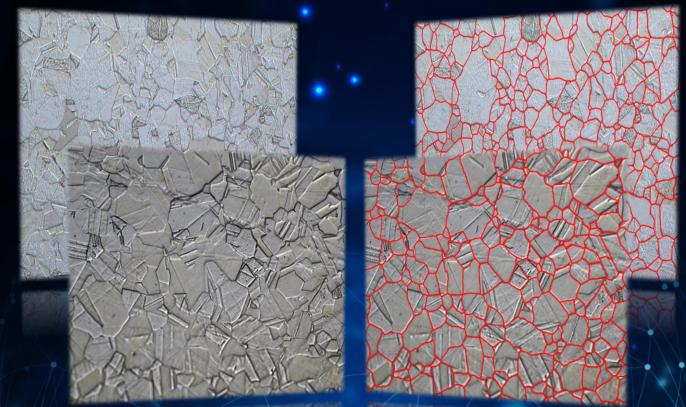

Discover more about One-click solutions using Artificial Intelligence

Aluminium Austenite Brass

Elements

Automatic Segmentation

Artificial Intelligence (AI) and deep learning make the segmentation absolutely effortless. Segmenting grains using manual thresholding can be very tricky and tedious – this is now past.

One-click detection

Automatic and complete image segmentation without complicated workflows is provided by just one-click using AI in NIS-Elements.





Sample type flexibility

Al network can recognize grains on wide variety of images as it has been trained on large amount of samples.


Reliable AI grain detection currently works primarily Aluminium structures and similar material samples observed in polarized light with or without lambda plate.

Additional image samples are being continually added into the AI network to offer customers the best and the most comfortable grain segmentation on the market.



Al segmentation results

The results of AI segmentation on other various samples without any further adjustments:

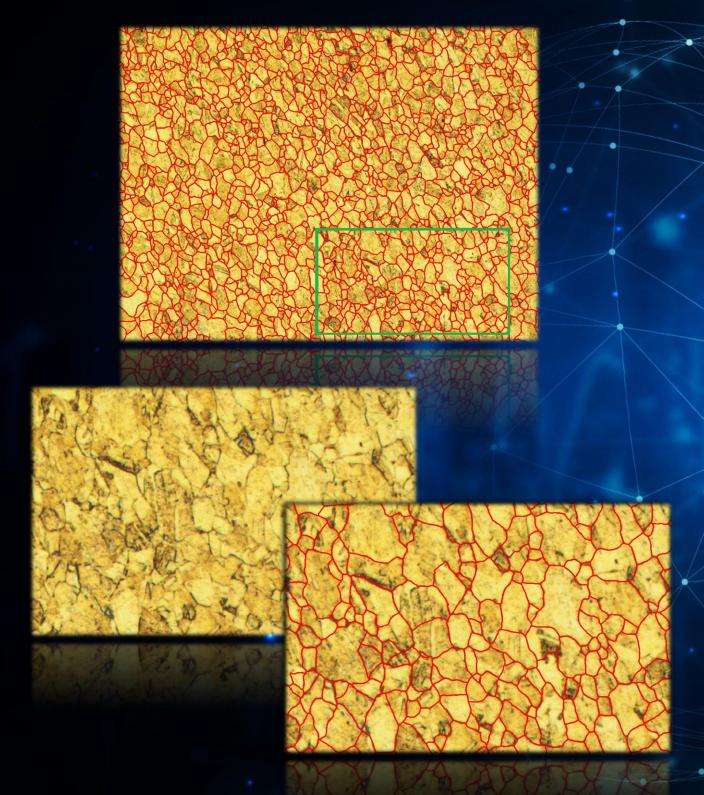

All mask segmentation results on images in this brochure have been created purely by our AI and have not been further altered or adjusted in any way.



Already pretrained for you

<i>•</i>					
Detection ×	Measurer	nent x			×
Detection Pre	esets				
	2	? Bi	rass_Cu		
Phase	Name		Color		4
1	Brass		000	•	
Save as.	Pro	perties		Delete	
Detection typ)e				
Ai					
- Ai Detection					
Brass (Pretr	ained)				
🗌 Fine grai	in structure				
		Sav	ve (


And the best part? Grain Size AI detection in NIS-Elements comes already ready to use! Simply click and the AI detection will do the work for you all by itself.

Customize your own Al

Do you have samples you would like to achieve better results on? Create your own custom AI for specific samples using the NIS-Elements NIS.ai module to get the best results possible.



Automatic complete grain size results with just one-click

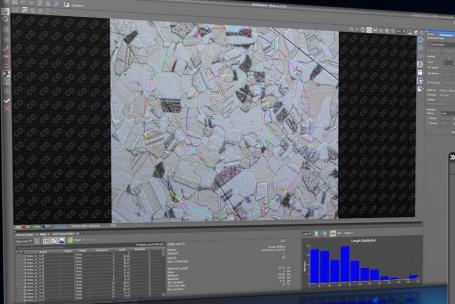


Various measurement methods including the Planimetric and the Abrams method.

In accordance with: ASTM E1382-97 and E112-13 **JIS G0551** ISO 643 **GB/T 6394**

NIS Elements Adviced Stations for your imaging World		Grain Size Report		
Submitter:	Laboratory Imaging s.r.o.			
Test:	Test nr.36			
Product:	Bullet 23AS	Sample No.:	26	
Material:	Brass	Order No.:	B-314	
Submitted for test:	21.06.2023	Charge No.:	23	
Tested:	21.06.2023	Drawing No.:	1	
Standard:		ASTM E112-13(2013)		
Test Method:		Circular Method		
Number of measured fields:		1		
	Measur	ed Table:		
		Bras	s	
N		115,00	00	
L SD [µm]		47,57	5	
L 95% Cl [µm]		8,789	9	
L MEAN (µm)		60,33	2	
L RA [%]		14,56	7	
Grain size numbe	r.	5		

Analyzed Image





Detection × Measurement × Measurement Presets O Circular Method Test Mask Count: Min. diameter: Max diameter: 🗹 Fit to screen Default Size 1741 µm x 1306 µm Image size: Grid length: 6113.4 µm Standard Restrictions Length Feature: Save

Complete measurement results in Report including the number of measured fields or images, the number of grains and the grain area (mean, minimum and maximum) using NIS-Elements

The company name, logos and company symbols of Nikon and NIS-Elements in this brochure are registered trademarks of NIKON CORPORATION.

